Hydra Grip-O-Matic® USE WITH 2/3 JAW PULLERS

6, 8, 11 & 30 Ton

A self contained pulling system in a compact package












- You get the world's most copied puller design; the harder the pulling force, the tighter the jaws grip for secure holding force.
- Power Team pullers are tested for top performance and reliability at maximum capacity and jaw spread.
- Removing a wide variety of gears, bearings, bushings, pulleys and other press-fitted parts becomes a routine task.
- Easily metered release valve control knob.
- · Spring loaded live centering cone.
- · Bladder type oil reservoir.
- · Rapid adjustment.
- · Use with 2 or 3 jaws.
- Supplied with a sturdy storage/carrying case.
- Features Power Team's exclusive Marathon Limited Lifetime Warranty

HST11S

Hydra Grip-O-Matic[®] pulling system - These pullers are ideal for pulling a wide variety of press-fitted parts including bushings, bearings, wheels, gears and pulleys. Applications can be found in a wide variety of industries as well. Grip-O-Matic^{*} pullers have been rigorously tested for top performance and reliability. PH82K is a complete pulling system

which includes a hydraulic power module, 2-way puller head, jaws, legs and bearing splitter attachment; all contained in a convenient carrying case.

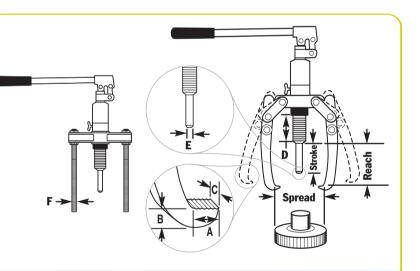

Cyl.	Order	Rea	ich	Min.	Max.	Spread								
Cap. (tons)	No.	Studs (in.)	Jaws (in.)	Reach (in.)	Studs (in.)	Jaws (in.)	Stroke (in.)	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	F (in.)	Wt. (Ibs.)
6	PH63C		6	_	_	77/8	31/8	7/16	¹ /4	7/8	31/4	7/8	_	10.8
8	PH83C		7 ¹ / ₂		_	9 ¹³ / ₁₆	3 ¹ /8	7/16	³ /8	1	3 ¹ / ₄	11/8	_	14.5
15	PH113C	—	9		_	11	31/8	9/16	³ /8	11/8	3 ¹ / ₄	11/8		17.6
30	PH303C	10 ¹ / ₂	14 ³ /4			21 ¹ /4	4 ¹ / ₄	1 ¹ /16	17/16	$1^{1/2}$	611/16	2 ¹ /8	5∕s-18 UNF	71.2
8	PH82K	10 ¹ / ₂	85/32	429/32	1151/64	9 ²¹ / ₃₂	3 ¹ /8	²³ / ₆₄	1	5/8	3 ¹ / ₄	7/8	⁵/ঃ-18 UNF	35
15	HST11S	—	5 ²⁹ / ₃₂	—	—	161/8	31/8	—	—	—	3 ¹ / ₄	7/8	—	32



218



Puller

Accessories

Puller Accessory converts PH113C into a Hydraulic Straightening Tool – Portable...Good for straightening mechanical shafts, round bars, etc. Simply remove pump and cylinder from puller head and insert them into the straightening tool accessory. This product is widely used in steel mills, wire roll companies, wire extruding companies, textile industry, and any straightening situation where portability and power are required. Contoured heat-treated shaft adapter included.

No. HST11 - Spread: 3¹/₂" to 16¹/₈", Reach: 5²⁹/₃₂". Wt., 21 lbs.

Long jaw set for PH83C and PH113C Grip-O-Matic® pullers – This long jaw set is the perfect addition to the PH83C or PH113C Grip-O-Matic* hydraulic pullers. The extra long jaws give you the added capability of pulling a wider variety of parts. Jaw capacity is 8 tons when used with the PH83C puller; 15 tons when used with the PH113C puller.

No. 1188 – Spread: 11" to 12¹/₂", Reach: 12¹/₂".

